GINF #1062691, VOL 165, ISS 1

Effects of Magnetic Field on Synthesis and Thermoelectric Properties of $NaCoO_2$

W. NAMHONGSA, K. SINGSOOG, S. PAENGSON,
P. PILASUTA, T. SEETAWAN, P. MUTHITAMONGKO,
AND C. THANACHAYANONT

QUERY SHEET

This page lists questions we have about your paper. The numbers displayed at left can be found in the text of the paper for reference. In addition, please review your paper as a whole for correctness.

Q1. Au: Please provide Fig.1. and caption.
Q2. Au: Please provide citation in text for Fig.1. & Fig.2.
Q3. Au: A running head short title was not supplied; please check if this one is suitable and, if not, please supply a short title of maximum 50 characters that can be used instead.

TABLE OF CONTENTS LISTING

The table of contents for the journal will list your paper exactly as it appears below:

Effects of Magnetic Field on Synthesis and Thermoelectric Properties of $NaCoO_2$
W.Namhongsa,K.Singsoog,S.Paengson,P.Pilasuta,T.Seetawan,P.Muthitamongko, and C. Thanachayanont
Integrated Ferroelectrics, 165:1–5, 2015

Taylor & Francis
Taylor & Francis Group

ISSN: 1058-4587 print / 1607-8489 online
DOI: 10.1080/10584587.2015.1062691

Effects of Magnetic Field on Synthesis and Thermoelectric Properties of $NaCoO_2$

W. NAMHONGSA,[1,*] K. SINGSOOG,[1] S. PAENGSON,[1] P. PILASUTA,[1] T. SEETAWAN,[1,*] P. MUTHITAMONGKOL,[2] AND C. THANACHAYANONT[2]

[1]Program of Physics, Faculty of Science and Technology Thermoelectrics Research Center, Research and Development Institute, Sakon Nakhon Rajabhat University, Sakon Nakhon, 47000, Thailand

[2]The National Metals and Materials Technology Center Thailand Science Park, Pathumthani, 12120, Thailand

We synthesized polycrystalline sodium cobalt oxide ($NaCoO_2$) by using solid state reaction (SSR) method in a magnetic field. The powder of Na_2CO_3 and Co_3O_4 were mixed by ball milling and compacted in a magnetic field. The characterization of microstructure of powder size and crystal structure were analyzed through XRD. Thermoelectric properties and the lattice parameter of $NaCoO_2$ showed little change in magnetic field. The lattice parameters of NaCoO2 are a = 2.8443 Å, b = 2.8443 Å, and c = 10.8091 Å in the hexagonal structure ($a = b \neq c$).

Keywords Applied solid state reaction; magnetic field; $NaCoO_2$

1. Introduction

In recent years, the $NaCoO_2$ compound has been studied extensively due to their exotic features, such as a large and unusual thermo power and strange magnetic order [1]. The sodium deintercalation of layered Na_xCoO_2 found in this study was interesting properties in cobalt oxides within magnetic properties. The highly hygroscopic material makes it very unstable under ambient conditions, and unavoidable Na evaporation during high-temperature. The essential requirements are high Seebeck coefficient (S) and low electrical resistivity (ρ). The performance of thermoelectric materials, measured by using dimensionless figure of merit, ($ZT = S^2T/\rho\kappa$) where T is absolute temperature, and κ represents thermal conductivity with values close to unity, is considered good thermoelectric materials [2, 3]. In this work, we synthesized the $NaCoO_2$ by using solid state reaction method in magnetic field, and analyzed crystal structure by using XRD, and SEM for measuring thermoelectric properties, such as the Seebeck coefficient and electrical conductivity for possible development of p-type thermoelectric leg modules.

Received December 22, 2014; in final form May 22, 2015.

*Corresponding authors E-mail: starfirth@windowslive.com; t seetawan@snru.ac.th

Color versions of one or more of the figures in the article can be found online at www.tandfonline.com/ginf.

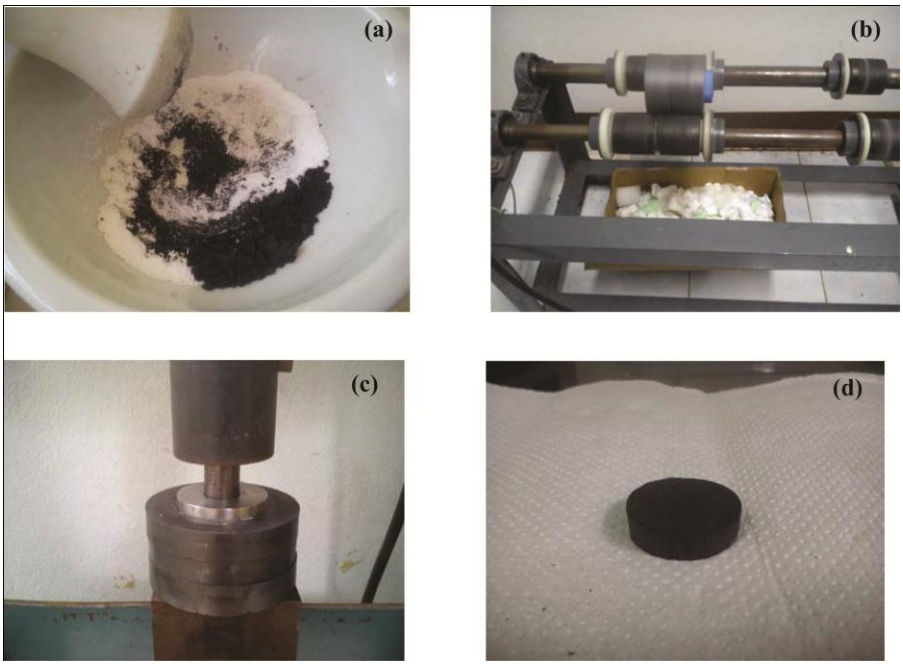

Figure 2. (a) Crushed powder samples of $NaCoO_2$, (b) ball milling in magnetic ring of $NaCoO_2$, (c) pressured in magnetic ring by hydraulic at 77 MPa, (d) pellet after sintered of $NaCoO_2$.

Q1

Q2

2. Experimental Details

The $NaCoO_2$ was synthesized from powder precursor of Na_2CO_3 and Co_3O_4 in stoichiometric proportions by using solid-state reaction method [3]. The powder precursor was mixed by hand crushing for 1 hour and ball milling for 1 hour and calcine at 800°C for 12 hours in air. The calcine powder was pressured in magnetic ring by single hydraulic at 77 MPa into the pellet and sintered at 900°C for 24 hours in air. X-ray diffraction data were collected at ambient temperature from 10° to 70° with a step of 2° using a Shimadzu diffractometer equipped with Cu Kαradiation. The thermoelectric properties were measured by ZEM3 ULVAC-RIKO at a temperature range 300–480 K in argon atmosphere. The crystal structure and microstructure of compound were measured and observed by powder by using X-ray diffraction (XRD) [4].

3. Results and Discussion

The results revealed as shown in Figure 3, the x-ray diffraction patterns for mixed powder calcine at 800°C for 12 hours in air, and in Figure 4, the x-ray diffraction patterns for sintered at 900°C for 24 hours in air. However, the effect of oxygen annealing was found to

change the magnetic properties of the material, especially at low temperature which will be discussed in details later. Normally, sintering performing on pellets improves the compound formation, but in this case Co_3O_4 impurity phase was observed in sintered pellets due to the slow reaction in the core of the pellet, compared to the outer surface area. The x-ray intensity and 2θ [4] significance corresponded with PDF card 27-0682. The $NaCoO_2$ has been crystal structure of hexagonal structure with high intensity in (hkl) of (002), and Q3 *Synthesis and Thermoelectric Properties of $NaCoO_2$* 3

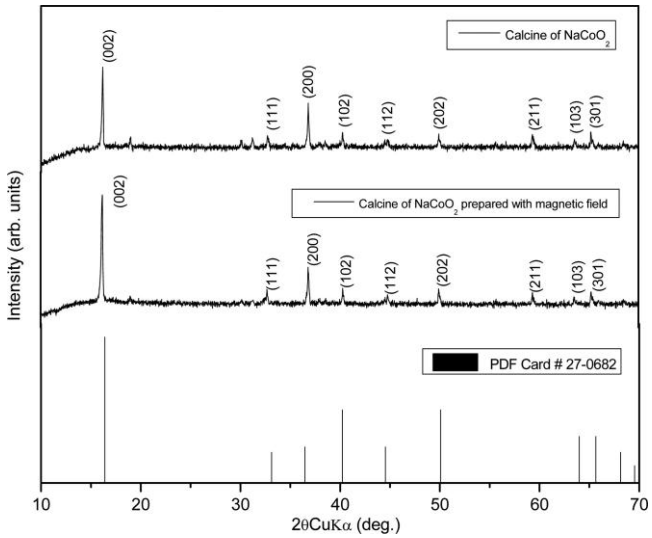

Figure 3. X-ray diffraction patterns of the $NaCoO_2$ calcined as verified from PDF card 27-0628.

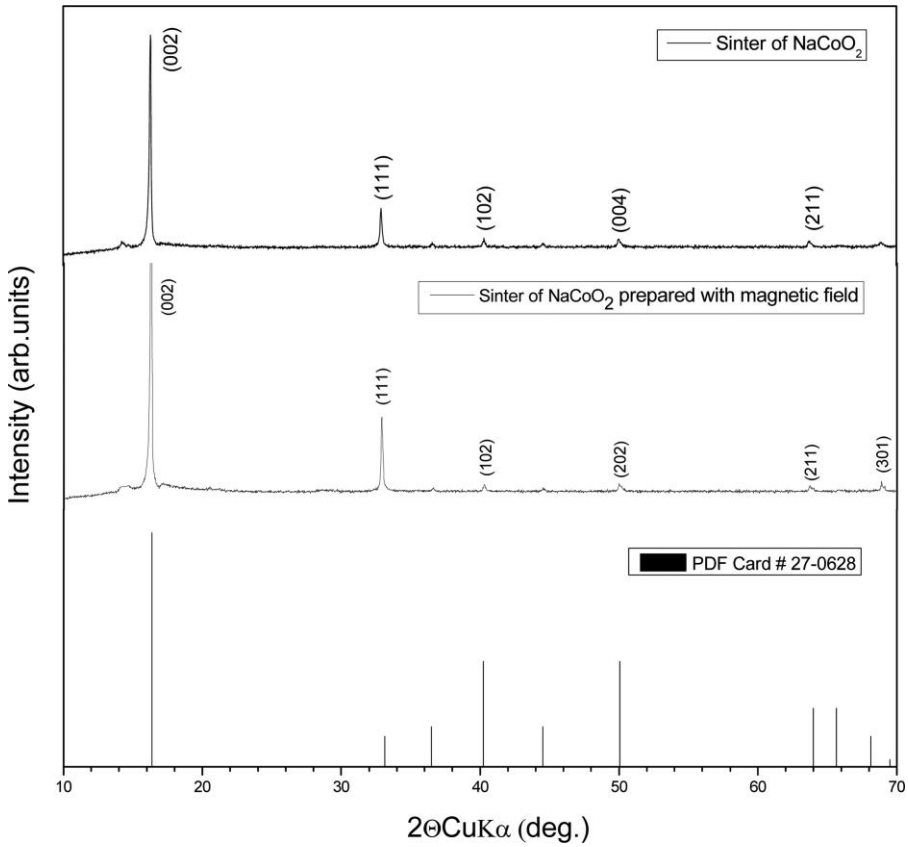

Figure 4. X-ray diffraction patterns of the $NaCoO_2$ sintered as verified from PDF card 27-0628.

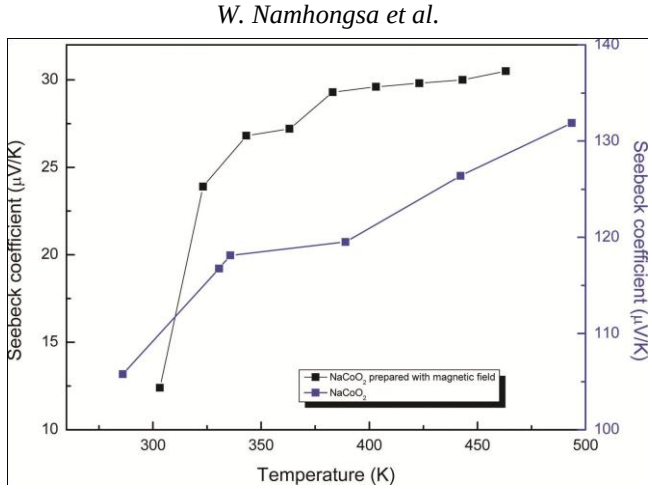

Figure 5. Temperature dependence on the Seebeck coefficient of $NaCoO_2$.

obtained the lattice parameters of a = 2.8443 Å, b = 2.8443 Å, c= 10.8091 Å (a = b ≠c) as confirmed by TEM result.

So that, the angle of structure a = 2.8443 Å, b = 2.8443 Å, c = 10.8091 Å of hexagonal structure (a= b ≠ c). These lattice parameters are in good agreement with the previously reports [5]. The crystal size of $NaCoO_2$ prepared with magnetic field is 776.48 Å, 1520.5 Å and crystal size of $NaCoO_2$ nonmagnetic field is 737.59 Å, 1071.5 Å. The lattice strain of $NaCoO_2$ prepared with magnetic field is 0.0074, 0.0019 and $NaCoO_2$ nonmagnetic field is 0.0078, 0.0027. Stress of $NaCoO_2$ is 13.9 Pa.

Figure 5 shows the temperature dependence on the Seebeck coefficient of $NaCoO_2$. The Seebeck coefficient values of $NaCoO_2$ showed positive value which indicated p-type thermoelectric material.

Figure 6 shows the temperature dependence on electrical resistivity of $NaCoO_2$. The electrical resistivity has been decreased with increasing temperature, resulting in semimetal

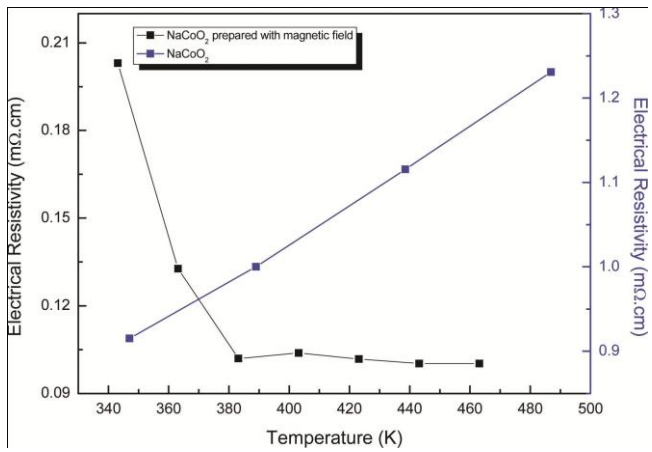

Figure 6. Temperature dependence of electrical resistivity of $NaCoO_2$ [5].

behavior [3]. In addition, the $NaCoO_2$ has semi-metallic behavior due to its metallic behavior as temperature increased.

4. Conclusion

We synthesize $NaCoO_2$ polycrystalline by using solid state reaction method in a magnetic field. The crystal structure of $NaCoO_2$ sample is in hexagonal structure [8]. The electrical resistivity was 0.1 mcm at 463.15 K, and then decreased with increasing temperature, resulting in the semimetal behavior. The Seebeck coefficient of $NaCoO_2$ was 30 μV/K, and then increased with increasing temperature which corresponded to increase grain size. The Seebeck coefficient positive values resulting from thermoelectric materials, [9] but the performance of $NaCoO_2$ was not good if we prepared in magnetic field.

Funding

This work was financially supported by Thermoelectric Research Center, Sakon Nakhon Rajabhat University and The National Metals and Material Technology Center (MTEC).

References

1. H. Kishan, V.P.S. Awana, M.A. Ansari, Anurag Gupta, R.B. Saxena, V. Ganesan, A.V. Narlikar, C. A. Cardoso, R. Nirmala, Devendra Buddhikot, and S.K. Malik, Resistivity and Thermoelectric power of NaxCoO2 (x = 1.0, 0.7 and 0.6) system. *J. Appl. Phys. MMM.*, **97**, 10A904.1–10A904.3 (2004)

2. W. Jeffrey Fergus, Oxide materials for high temperature energy conversion. *J. Euro. Ceramics. Soc.*, **32**, 525–540 (2012).

3. H. Okabe, J. Akimitsu, T. Kubodera, M. Matoba, T. Kyomen and M. Itoh, Low temperature magnetoresistance of layered cobalt oxides Na_xCoO_2. *Physica B: Condensed Matter*., **378–380**, 863–864 (2006).

4. W. Namhongsa, T. Seetawan, P. Muthitamongkol and C. Thanachayanont, Microstructure and Thermoelectric properties of $Na_{0.5}CoO_2$. *Adv. Mater. Res.*, **802**, 218–222 (2013).

5. P. Liu, G. Chen, Y. Cui, H. Zhang, F. Xiao, L. Wang, and H. Nakano, High temperature electrical conductivity and thermoelectric power of Na_xCoO_2. *SSI.*, **179**, 2308–2312 (2008).

6. K. Fujita, T. Mochida and K. Nakamura, High-temperature thermoelectric properties of $Na_xCoO_{2-\delta}$ Single Crystals. *Jpn. J. Appl. Phys.*, **40**, 4644–4647 (2001).

7. X. Zhao, H.Wang, S. Wang, D. Elhadj, J. Wang and G. Fu, Enhuancement of thermoelectric power factor in Na_xCoO_2/Au multilayers. *RSC Adv.*, **4**, 57148–57152 (2014)

8. R.J. Radwanski, and Z. Ropka, Crystal-field states in $NaCoO_2$ and in wet cobalt superconductors (Na_xCoO_2). *Acta Physica.*, **5**, 25–28 (2007)

9. Prof. Y. Lee, Synthetizing and Measuring Superconducting Sodium Cobalt Oxides (Na_xCoO_2) Crystals. Massachusetts Institute of Technology, Research Science Institute July 31 (2007).